


TECHNICAL DATA

Fluke 303 € • ,

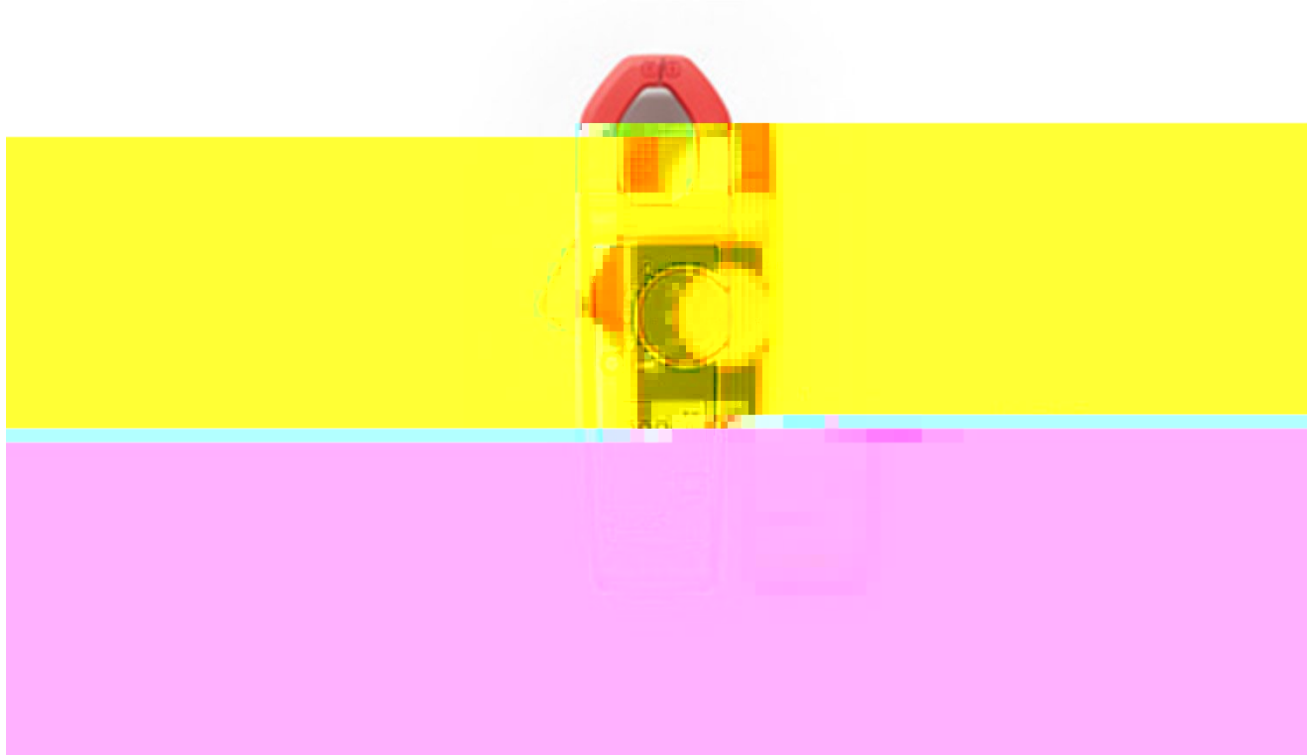

f „ ... †

- ĸ Å« ÁÃÃ , ÄÅÆÇÈÉ , ÊËÌÍÎÏÐÑÒÆ , ÓÉÔÕÖ%×Ø , ‡€• fÙ , ÚÛÜÝÞßàáâã•
- ä ÛfÜ600A , · ä æç è é ê ë ù ø%ì í •
- 30mm%Ò€î •
- CAT IV 300V/CAT III 600V%ï ð ĸ ñ ò •
- 1.8%%ï ó ô õ •
- ö ÷ ø ù •
- ú û ü ¨ •

‡ ^ %Š : Fluke 303 € • ,

Fluke 303ý þ ä Û€• , , ÚÛÜÝä , · æç f„ E %ë × , š ° ² Ýä ÛfÜ600A , · æç è é ê ë ù ø%ì í ĸ Å« ÁÃÃ ‡ Fluke 303ä Û€• , ÄÅÆÇÈÉ , ÊËÌÍÎÏÐÑÒÆ ÓÉÔÕÖ %×Ø•

ÝĸÅ î f € ,



[...t/f /fÜ%P •€ , Ÿ' ' " ð ACD-14-PRO](#)

‡ ^ < Æ: Fluke 303 € • ,

		302+	303
ä Û f Û		400.0A	600.0A
		1.8% ± 5	1.8% ± 5
ä Û f		400.0/600	400.0/600
		1.5% ± 5	1.5% ± 5
Û f		400.0/600	400.0/600
		1.0% ± 5	1.0% ± 5
f •		4000	4000
		1% ± 5	1% ± 5
		70	70
		208 x 58.5 x 28	208 x 58.5 x 28
		30 mm	30 mm
		CAT III 600 V	CAT III 600 V
		0 -40°C	0 -40°C
		>2 /!	>2 /!



TL75

TL75

Ordering information



Fluke 303

Fluke 303 € • ,

\$ %:

- € , - &
- 2" AA f #
- Ū í Ō'
- ... † (
- 2 ũ) ũ

Optional accessories Description

Ú Ū f ñ ò * 1,000 V % Fluke + , - . € 8 / Linesman € O ¥ 1 2 € ù 3 ð ¿ • • 4 5 6 %
 (7 8 9 : ; € î ¥ 4 ² < 3 = ý ý < 3 •

Ergonomic handles offer maximum torque and safety.

