


TECHNICAL DATA

Fluke 305 € • ,

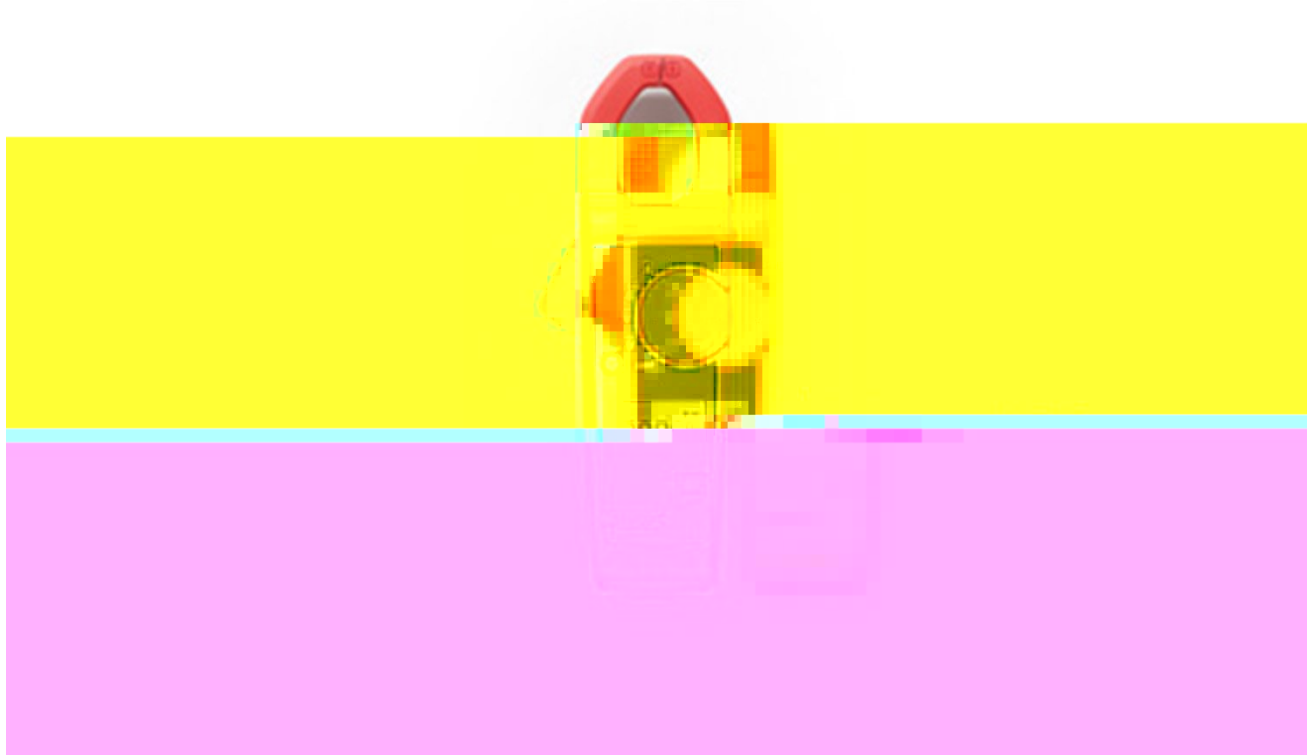

f „ ... †

- ĺ Å« ÁÃÃ , ÄÅÆÇÈÉ , ÊËÌÍÎÏÐŃÒÆ , ÓÉÔÕÖ%×Ø , ‡€• fÙ , ÚÛÜÝÞßàáâã•
- ä ÛfÛ999.9A , · åæçèéêÛëØ%ì í •
- 30mm%Ò€î •
- CAT IV 300V/CAT III 600V%i ð ĺ ñ ò •
- 1.5%i ó ô õ •
- ö ÷ ø ù •
- ú û ü º •


‡ ^ %Š : Fluke 305 € • ,

Fluke 305ý þ ä Û€• , , ÚÛÜÝâ , · æç f„ E %ë × , š ° ² Ýä ÛfÛ999.9A , · æçèéêÛëØ%ì í ĺ Å« ÁÃÃ ‡ Fluke 305ä Û€• , ÄÅÆÇÈÉ , ÊËÌÍÎÏÐŃÒÆ ÓÉÔÕ Ö%×Ø•

Ý ĺ Å í f € ,



[Fluke ACD-14-PRO](#)

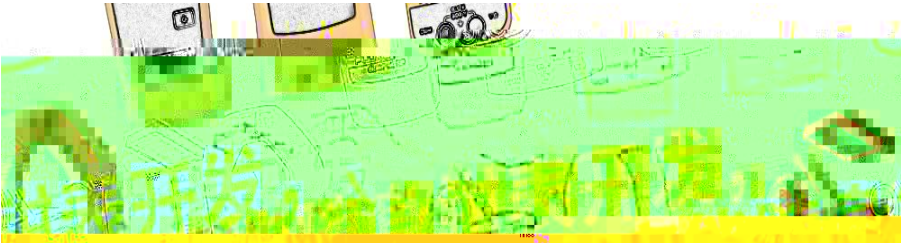

Fluke 305 € 305,-

		302+	303	305
Max. Current		400.0A	600.0A	999.9A
	Accuracy	1.8% ± 5	1.8% ± 5	1.5% ± 5
Max. Voltage		600V		
	Accuracy	1.5% ± 5		
Voltage		600V		
	Accuracy	1.0% ± 5		

Ordering information



Fluke 305

Fluke 305 € • ,

O1 :

- € , - 2
- 2/ AA f.
- Ūí Ō3
- ...† 4
- 2ü 5ü

Optional accessories Description

€ • , f „ ...† ‡ ^ %Š Ergonomic handles offer maximum torque and safety.

€ • , † ‡ < %Œ ŪŪf ñ ò 6 1,000 V % Fluke 789: € 8 ; & Linesman € < ¥ = > € ù ? ð ¿ • • @AB% 4CDEFG€î ¥ 4² H? I ýýH? •

