



TECHNICAL DATA


Fluke MT4 MAX € • , f „



... † ‡ ^

- ÅÄÃÄÄÄÆÇ¹ È, †ÉÊËÌ , Í Î , †
- Ì ÑÒ% LCD ÓÔÕÖ× ØÙÁÚÛÜ! Ý Þ ß à
- á Òã ä % ä å Ø Æ „ • ç è Š é é
- 8:1 % è ì í Å³ î ï ð
- IP40 ñ ò ó ô õ ÷ • % ø ð
- Ò Õ ù á ú ù Ó ù ü ý f ...¹ ù þ , † %
- f | f ¹ , Õ Ö > % , †
- ž ° (1) Å Å ž
- ° ø ¥

% Š < Æ: Fluke MT4 MAX € • , f „

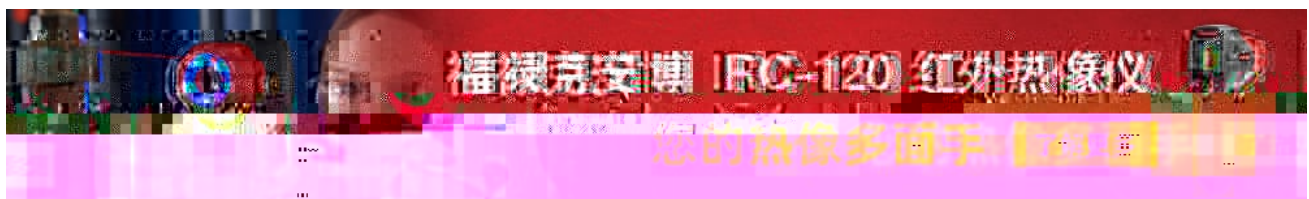

' ' " , " Š é % 1 70 % ¶ 1 MT4 MAX € • , f „ • „ • % Å ... È ø , † % È È ! 1 " # \$ % & ' (^ %) * + , • - . á ä % ä Ò € • , f „ / O 1 1 2 % 3 4 5 6 1 7 8 ^ , 9ª È Á •




[IRC-120 €•, f„](#)

%Š• Ž : Fluke MT4 MAX €•, f„

€•, f

f...+,	-30 :C ; 350 :C– -22 :F ; 662 :F™	
	„ 0...C	ÝD > 2.0 :C Û > 2.0%¹ ÐEÓ
	F -10 :C ; <0 :C	> 2.0 :C
Ã...– <=f... 23 :C > 2	< -10 :C	> 3.0 :C
:C ? % @ ABC™	F 32 :F	ÝD > 4.0 :F Û > 2.0%¹ ÐEÓ
	F 14 :F ; <32 :F	> 4.0 :F
	< 14 :F	> 6.0 :F
GH? (95%)	<500 ms– ÝD% 95%™	
Å I GH	8 mm ; 14 mm	
J KL	0.10 ; 1.00	
ë ì í Ä³ î ï ð	8:1– M † 90% ? à	

Ordering information

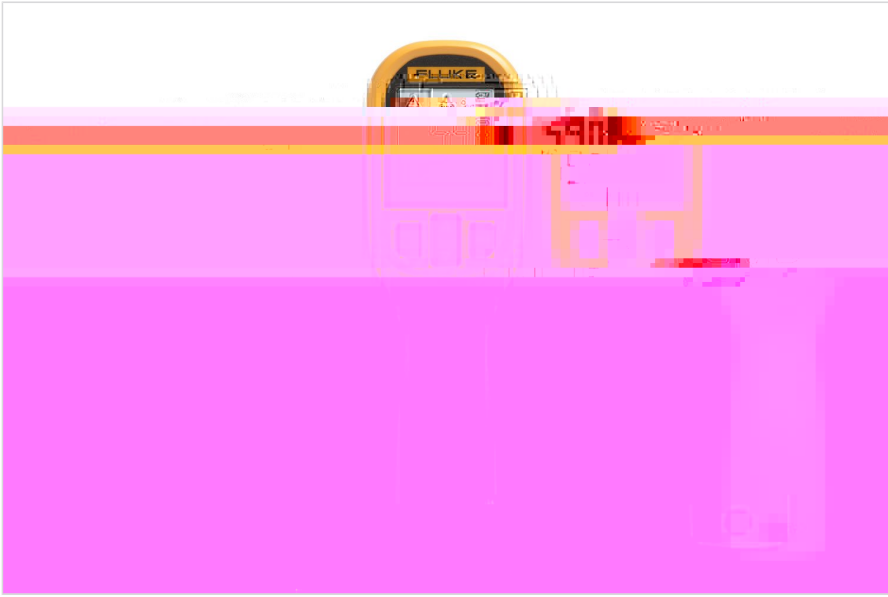

Fluke-MT4 MAX

- Fluke MT4 MAX €• , f ,
- 1 5f ž
- ÁÚgh

Optional accessories Description

† ‡ ^ %Š < Ć• Ž•• Ergonomic handles offer maximum torque and safety.

† ‡ ^ Ć• ' • ' È Á ž i ó ô 1,000 V% Fluke j k l m n ú 8 o i Linesman p | q r n ø s ` a • • t u v % w x y z { | n } | 4 ³ ~ s • € € ~ s •



Fluke. € • , f „ ... t † ^ %

Š < (E • Ž • • ' ' " " • — — '™Š > 400-810-3435

œ • Š < (Ež < • • Ÿ j i (E • — — '™

Š > 400-615-1563

Š < (E • Ž • • ' ' " " • — — ' ' Ÿ ŋ ¥™

Š > 021-54402301, 021-54401908 | § 269

Š < (E • Ž • • ' ' " " • — — '™ ©ª « — Ÿ ®

™Š > 0755-86337229