


TECHNICAL DATA

Fluke 101/101Kit € • , f „

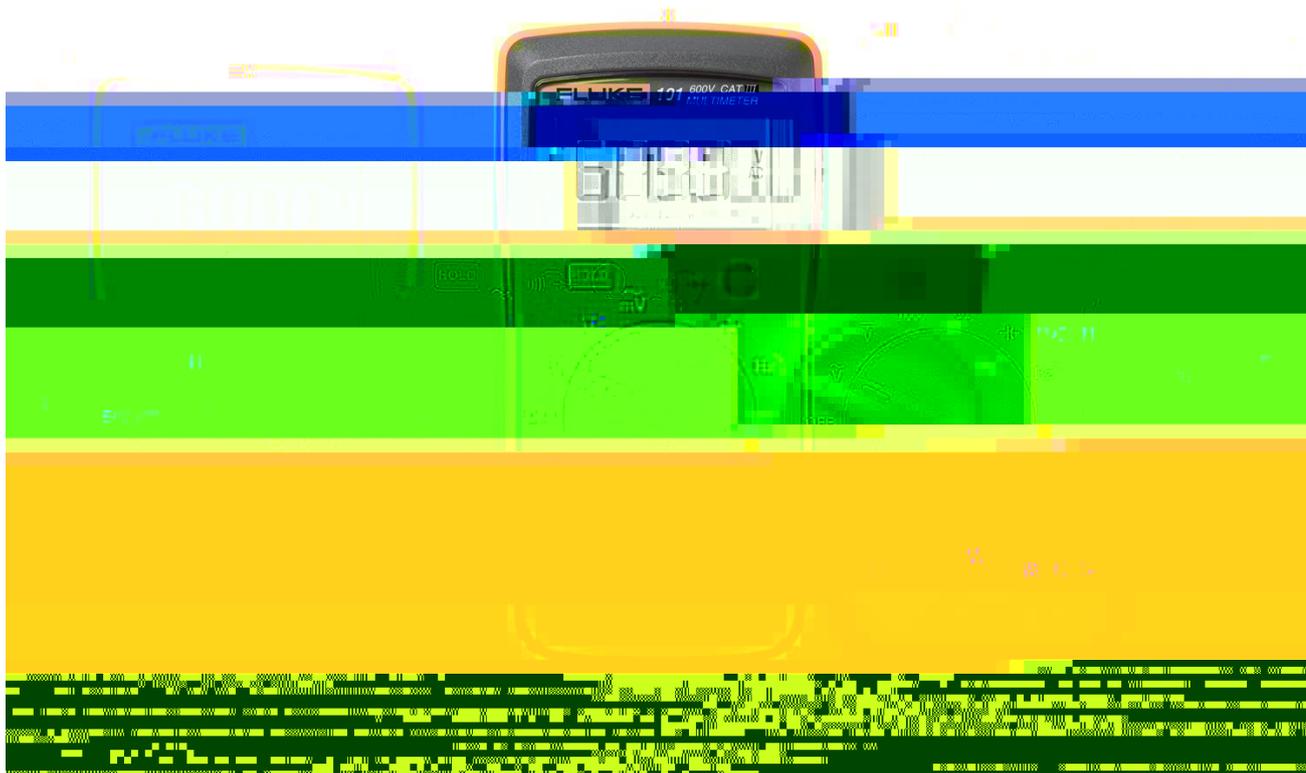


...† ‡ ^

- ÅÄÅ° ÅÆÇÈ° ÉÊËÌ Í ° Î Ï Ð160g, 1 ÑÒÓÔÕÖ×ØÙÚÛ
- ÜÝÞ...ßà
- ÜÝÏ á ‡ ^ ° ‡ ^ á ä ä ° á â æ ç è é ê ë ì í î ï ð ñ ° ò ó - „ ö ø
- € ö ÷ ø ù ú ° á ü ý þ ÿ ÿ
- IEC61010-1 CAT III 600V ° f 1 ‡ ^ < § ‡ ^ á ° ‡ ^ á ° ÷ ì f ° ÷ ì § - - < f

Fluke 101/101Kit

Fluke 101/101Kit		
AC Voltage (40-500Hz)	%	600.0 mV 6.000 V 60.00 V 600.0 V
	<	0.1 mV 0.001 V 0.01 V 0.1 V
	Ž	3.0%t 3 u 1.0%t 3 u
AC Current	%	6.000 V 60.00 V 600.0 V
	<	0.001 V 0.01 V 0.1 V
	Ž	0.5%t 3 u
AC Resistance	%	400.0 v 4.000 kv 40.00 kv 400.0 kv 4.000 Mv 40.00 Mv
	<	0.1 v 0.001 kv 0.01 kv 0.1 kv 0.001 Mv 0.01 Mv
	Ž	0.5 %t 3 u 0.5 %t 2 u 0.5 %t 2 u 0.5 %t 2 u 0.5 %t 2 u 1.5%t 3 u
Capacitance	%	50.00 nF 500.0 nF 5.000 wF 50.00 wF 500.00 wF 1000.0 wF
	<	0.01 nF 0.1 nF 0.001 wF 0.01 wF 0.1 wF

Ordering information

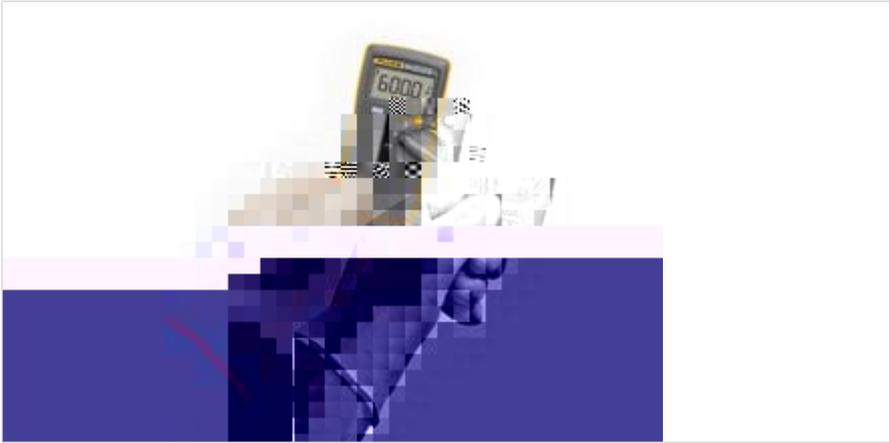

Fluke 101 €• , f„

hŸj

- €• , f„
- TL75 ± ^ i
- z P AAA ...{ ~ Ç Ó>
- Smart Strap™ ú! " # f \$ % Ũ ~ Fluke 101kit & ' ° Fluke-101&(' >

Optional accessories Description

Î Î ðÑÒÓÖÖ f ...É & 1,000 V < Fluke ð¥! \$ " ©8ª Æ Linesman " « § - - " ÷ ø ' • ® " ° < i ±²³´µ Ö§ 4´¶ø· ¸¸¶ø'

Î Î ðÖ×øÑòùôú Ergonomic handles offer maximum torque and safety.

