

TECHNICAL DATA

Fluke 1577 € • , f „



... † ‡ ^

- € • ‡ ^ ...Á: 500VÁ 1000V
- € • ‡ ^ : 0.1MÁ Ā 600MÁ
- ...Á...ÁÆÇÈ ...
- AC/DC ...Á
- DC mV
- AC/DC mA
- ...%~ 0.1Ā Ā 50MĀ>
- É Ē Ē
- ĩ ĩ ĩ ĩ Ā ‡ ^ Ē Ē Ē Ē Ē Ē
- Ö Ö × f • Ø f Û Û Û
- Æ Ç Ü Ý ... Þ Æ à á ...ã ...ã
- ä å æ RMS
- ç è é ê ì í
- î ĩ ‡ Ā...Ā è ð 30V ħ ° Ø ħ ... ò ĩ ‡ ó ô õ ö %ž € • ‡ ^ ° ß ÷ ø ù ú û f ü ý þ
- CAT III 100VĀ CAT IV 600V ‡ ā
- f¹ • Fluke TPAKTM ° ß f ü Ž •



Fluke 1577 € , f „

€ , f „ ...† ‡ ^ %Š < Œ

Fluke 1577 € , f „ € • ‡ ^ Š Š ó ô p Ā ä å æ • RMS , f „ ± ° ± à • !
" ° # \$ % & ' (f ð) * + , § - . Ë ¥ ù • ó ô "
' / Œ O ... Ç - Ā 1 ... - Ā ... 2 3 O 4 Ü 5 6 ° Fluke 1577 € , f „ 7 O Œ • 8 9 ° : ; • < = Ì Ì > ð ?
@™ ABCDE • F f "

Fluke 1577 € , f „


• Ž • •

	' ...' "	1000 V
GH...Á	å æ	I (0.2%+2)
	J è ¬ KL	0.001 V
MH...Á	' ...' "	1000 V
	å æ	I (2%+3)
GH...H	J è ¬ KL	0.1 mV
	' ...' "	400 mA
MH...H	...H å æ	I (1.0%+2)
	J è ¬ KL	0.01 mA
...%	' ...' •	400 mA
	...H å æ	I (2.0%+2)*
J è ...% / ‡ ^ ...Á	J è ¬ KL	0.01 mA
	' ...' •	50 M Ā
1 k Ā / V ñ J N ‡ ^ ...H	å æ	I (1.2%+2)
	J è ¬ KL	0.1 Ā

— — ~™

1 k Ā / V ñ J N ‡ ^ ...H	1 mA
‡ ^ ...Á	500 Ā 1000 V
	50 V
J è ...% / ‡ ^ ...Á	17 ^ o7d257 ^ o7d517 ^ o7d21000 V

Ordering information

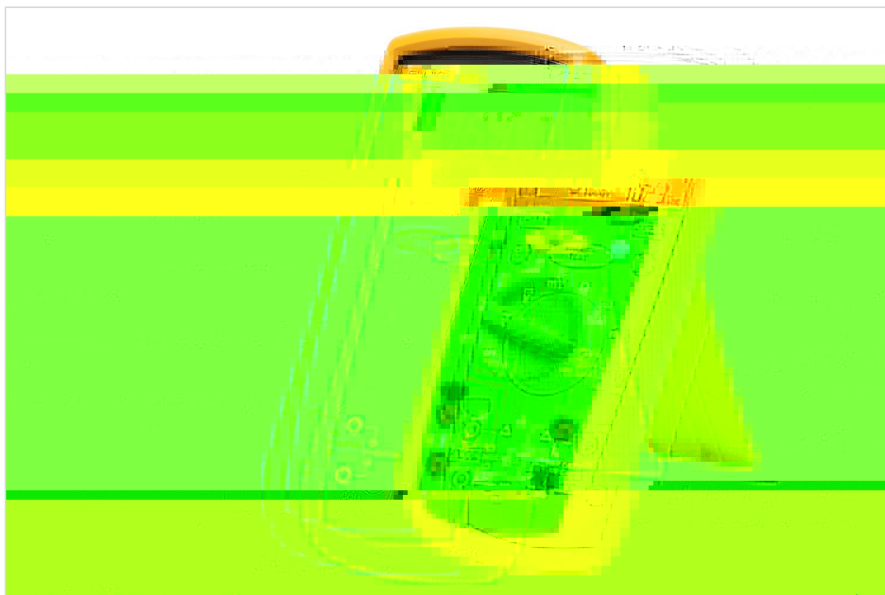

Fluke 1577

€ • , f „

f „

:

- 1 1 1 1
- ‡ ^ ÐÑ
- 000
- ÚÛ
- ...à AAj Ě...â
- † ‡ ^ %Š<
- Œb • • CD ê Ž

Optional accessories Description

ª « ¬ - ® - — ° ±² Ergonomic handles offer maximum torque and safety.

ª « ¬ - — ³ ±´ • f ...Á • , 1,000 V • Fluke € • • ' ' Á8" a Linesman' " § • - ' ú ý p " ' X - ~ • Ñ™Š > œ • ' ž § 4 ' Ô ` Ý Ô "

