




TECHNICAL DATA

# Fluke-190-202/S ScopeMeter

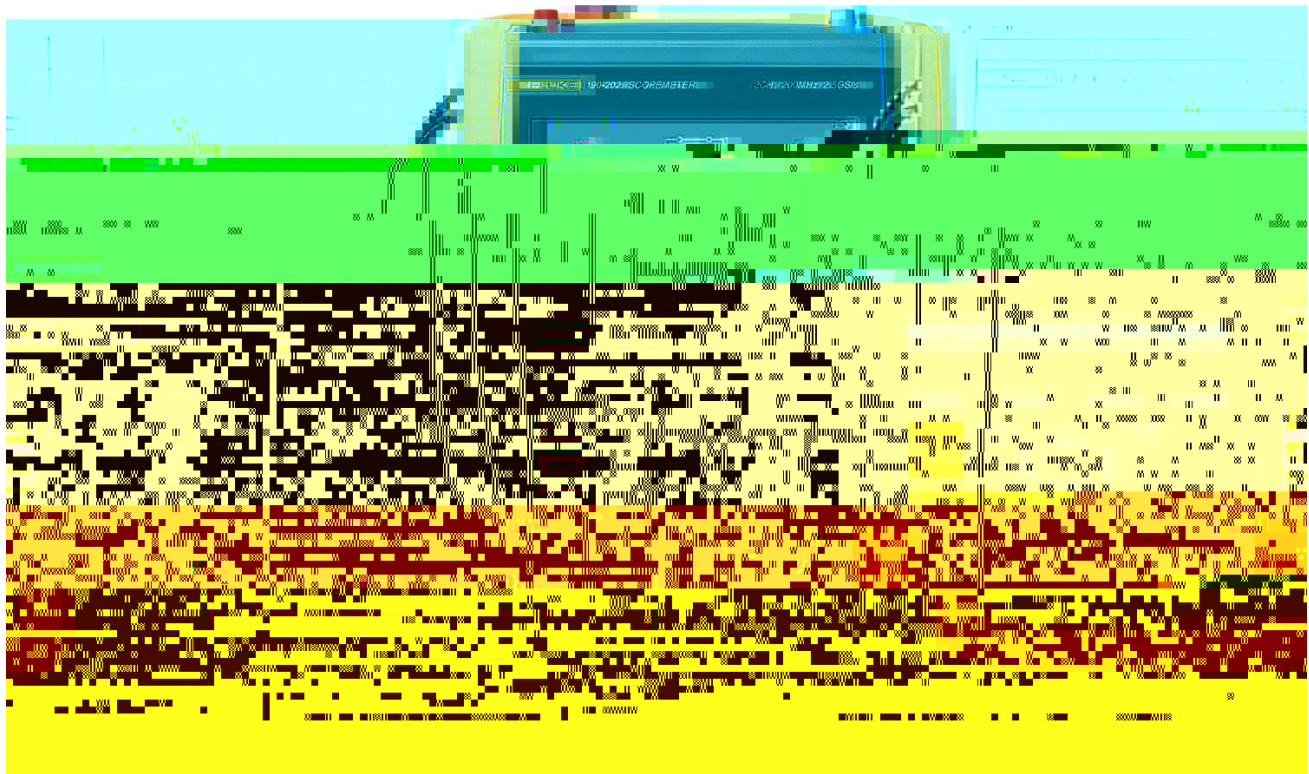

^ %Š <

€• , f „ ...† f „ CAT IV ‡ Fluke ScopeMeter 190 II ^ % Š < Ć• Ž• • ' ' Ć• " " •

Fluke ScopeMeter 190 II • ' É Ê Ë Ì Í Î Ï " Ć• Đ Ñ Ò Ž ...† ‡ " Ó Ò Ó Ô × > Ø Ù Ú Û Ü Ý " ScopeMeter Š < • Þ ß à á • â - ã • ä å Æ Ç È É Ê Ë Ì Ï Ñ Ò Ó Ô • ö ÷ ø • – Æ Š < ù û ^ ü ü ^ ý ^ ù þ Ý " ð ê >

190 II • ' 1 Ý " Š < • Þ Æ " Á Ý ± > Ý ‡ Æ TrendPlot™ - ScopeRecord™ ™ • Ž - ! ð Connect-and-View™ " # " \$ % & – Æ ' ð ( ) \* Ò ©


+ , - . , ^ % / 0 1 2







# Ordering information

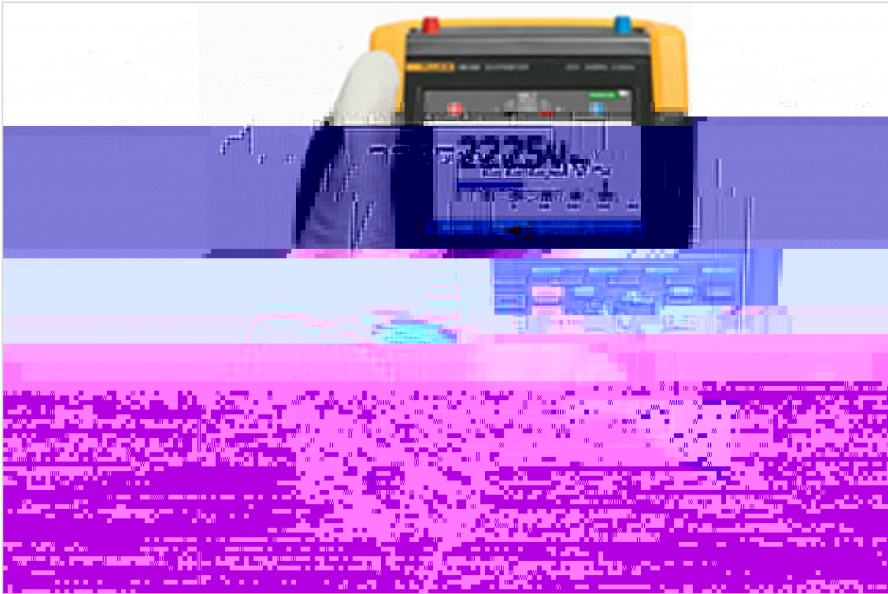

## Fluke 190-202/S

ScopeMeter • , f , ...† • Å 200 MHz Å 2 ~ B B DMM/} ë 1 2 Å SCC-290 ÷

ScopeMeter Å 200 MHz

2, ~ B

DMM/Ext. 1 2

C290 Î %

...† ‡ Š < • P SW90W FLUKEVIEW

Windows € ÷

### Optional accessories

### Description

Fluke VPS510-R Ó Ô Å ñ • š > œ Å  
ö ÷ ø ù ú û ü

Fluke VPS510-R ß Ü 4 š Ý ...† ‡ ^ ø , € Å 10:1, 500 MHz, 300 V CAT III >

Fluke VPS420-R š > œ • ž ö ÷ ø •  
ú û / ý ü • 100:1

VPS420-R...† ‡ Š < ø Å , Š < é ø Å , u Ç ù Å ^ a ´ © 100:1 Å ÿ  
Š < ! 3 © 150 MHz Å • - ^ T - Ü Ý é ' k " ^ € © 2000V CAT III /  
1200V CAT IV >

