




TECHNICAL DATA

Fluke-190-102 ScopeMeter € • , f „ ... † ‡

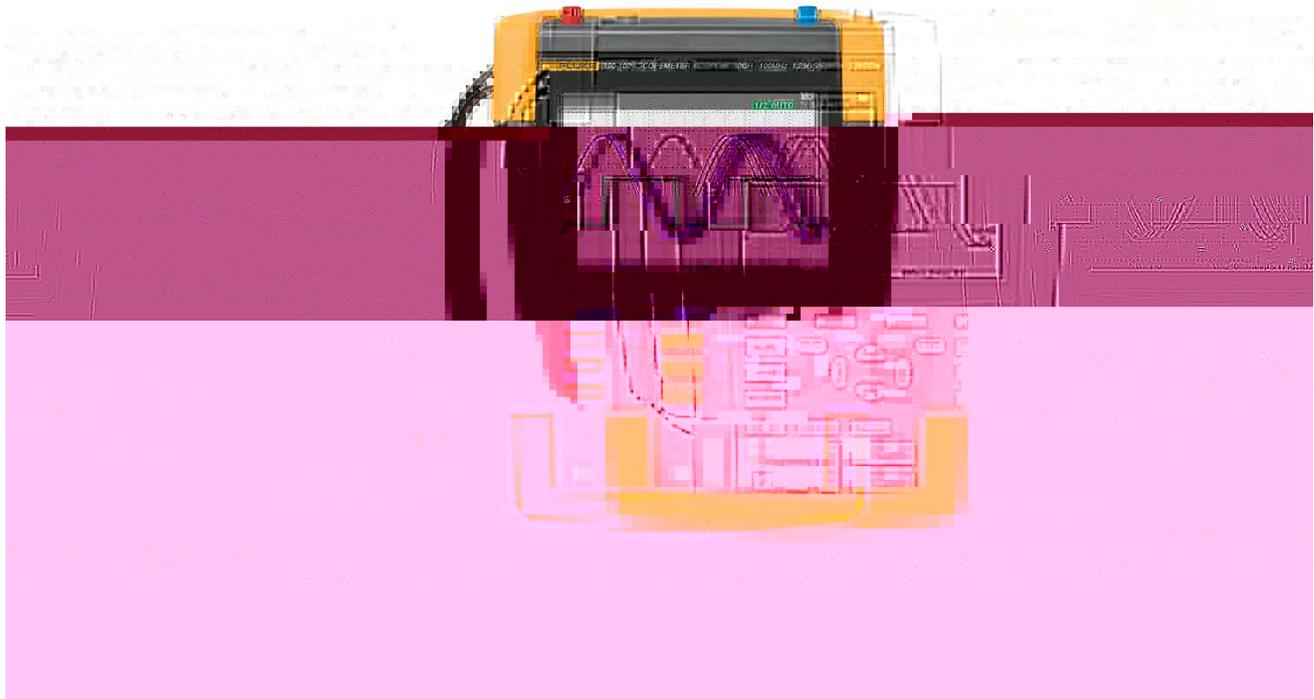

^ %Š <

€ • , f „ ... † f „ CAT IV ‡ Fluke ScopeMeter 190 II ^ % Š < (€ • Ž • • ' ' (€ • " " •

Fluke ScopeMeter 190 II • ' É Ê Ë Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý " ScopeMeter Š < • Þ Æ à á • â - ã • ä å ÷ æ ç è é ê ë Æ Ò Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý " • ð ñ ò ó • - Æ Š < ù ú û ü ý ^ ù p Ý " ð è >

190 II • ' 1 Ý " Š < • Þ Æ " Á Ý ± > Ý ‡ Æ TrendPlot™ - ScopeRecord™ ™ • Ž - ! ð Connect-and-View™ " # " \$ % & - Æ ' ð () * Ò ©

- + , - . , ^ % / O 1 2
- É Ê Ì Í á CAT III 1000V/CAT IV 600V
- 60 MHz ð 100 MHz ð 200 MHz - 500MHz ! 3 4 5 Á 6 7 8
- 9 : ; Ó Æ Ó < 5GS/s Æ ´ = ; Ó < 200 ps Þ > ? @ Ý " 4 5 - A B E
- ¶ Ç D E © F , ~ Þ † G H I 10,000 J Æ K L " Á M Ì N O P Q
- R - B 4 5 B Ý " 5000 è f f „ Ý ‡
- ~ S . ~ B 4 5 ² " ... † ‡ BNC 1 2 T U V . , Ý ‡ Š W
- Connect-and-View™ X Y Z " # ð [J \] ð ^ _ 3 C - ` a " #
- ScopeRecord Ž Æ H I † G ? : f b c < ü 48 d e



- TrendPlot
- j U" Z ŠWÁ* ; VpwmöVAöWöPFE- ek mAsöV/söw/sE
- I m- I nì í á IP51ÁÁÝ opqr
- /O" USBTsÁtuDEè - PC
- vOû^ wxX(c" yVekk/©
 - 190-X04Ä. - B45c < 7de z { BP291E
 - 190-X02ÄR- B45c < 4de z { BP290E- | c < 8de Ý7 ÷ BP291E
 - ÝÁ7" } ~^ w• ^ • EBC290 á Ý^ w• ^
- €• " ^ w, " Á f„ (...^ w
- †™èO†eÄÁÝz ^ Kensington€%- á ÜŠ- %Š...† ‡ " < ĆĎ•

Ž• Öý- CAT IV ÊËÌ Í %• . ' ,

Fluke ScopeMeter 190 II • ' ' XŽ...† ‡ 9ÝR" " • " R- B- . - B- ...† ‡ ÄËËÌ Í -xí CAT III 1000V/CAT IV 600V qr ² UVŠW>

Ď• Ž• : Fluke-190-102 ScopeMeter€• , f „ ...† ‡

[™Š > œ• Ž œ< • Ž Ý 9](#)

Fluke 190 II ^ % ScopeMeter- —™Š > œ-- ScopeMeter- • Ž Ý 20• j ĎE ²¥| •

- á ÊËÌ Í < ü CAT III 1000V / CAT IV 600V" R- B- . - BĎ• Ž...† ‡ ÄFluke 190 II • ' ScopeMeter€...† ‡ É ĐŌn; öÜÝĐ- Ď• ĐĎ 1 E> " Á 7 8 60 MHzö 100 MHzö 200 MHz - 500 MHz! 3 4 5 Ä ²e 9: ; Ó < 5 GS/sÄ´ =; á 200 psÄF, - B" ¶||DE • Á




Ÿãã¼	0°C à 40°C 含~ w£ 0°C à 50°C 不含~ w£
Óãã¼	-20°C à +60°C
Ÿããæ	CAT IV 600 V/ CAT III 1,000 V 最Óá 2,000 m (6666 ft) CAT III 600 V/ CAT II 1,000 V 最Óá 3,000 m (10,000 ft)

ÉÉúú

Äçèéé	1,000V CAT III/600V CAT IV (EN61010-1)
-------	--

Ordering information

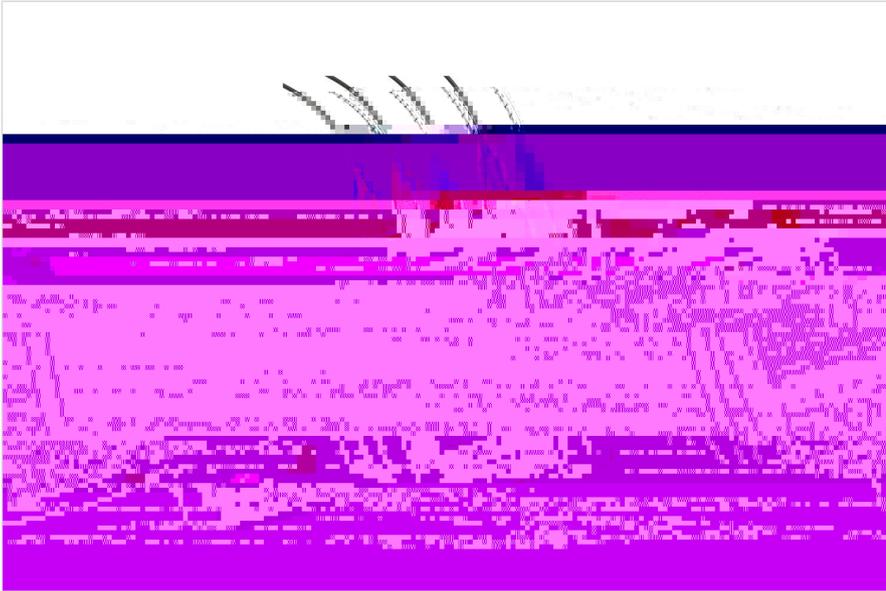

Fluke-190-102

Scope Meter • , f , ...† • Å 100 MHz Å 2 ~ Bæ DMM/} ñ 1 2

Includes:

- Color ScopeMeter€ 100 MHz
- 2 channels
- DMM/Ext.input

Optional accessories

Fluke MA190 MA190 ó ô õ • ö • ÷ ø ù ...ú û ü •

Description

MA190 MA190 附 ÷ 组 Fluke 190 • ' ...† ‡ Ô ï Ñ 医学 Ò 像 ~ ` a • ¼ UV t u >

Fluke VPS510-R ý þ Å ñ • š > œ Ä ö

Fluke VPS510-R æ Û 4 æ Ý ...† ‡ ^ 压探þ 组 红, É Å 10:1, 500 MHz, 300 V CAT III >

Fluke VPS420-R š > œ • ž ö • / • 100:1

VPS420-R...† ‡ Š < 探þ 组 Å 红, Š < ÿ 探þ Å 黑, u ĩ 夹 ù Å ^ 压 ´ ¾ © 100:1 Å 最 ĩ Š < ! ¾ © 150 MHz Å • - ^ 压 探针尖 T ~ ä ä 导 ĩ Å k " ^ 压 É © 2000 V CAT III / 1200 V CAT IV >

